

Ordering Information

3300 XL 11 mm Proximity Probes:

330701 3300 XL 11 mm Probe, 1/2-20 UNF thread, without armor

330702 3300 XL 11 mm Probe, 1/2-20 UNF thread, with armor

330707 3300 XL 11 mm Probe, 5/8-18 UNF thread, without armor

330708 3300 XL 11 mm Probe, 5/8-18 UNF thread, with armor

Part Number-AXX-BXX-CXX-DXX-EXX

Option Descriptions

A: Unthreaded Length Option

Note: Unthreaded length must be at least 1.0 inch less than the case length.

Order in increments of 0.1 in
Length configurations:
Maximum unthreaded length: 8.9 in
Minimum unthreaded length: 0.0 in
Example: 0 4 = 0.4 in

B: Overall Case Length Option

Order in increments of 0.1 in
Threaded length configurations:
Maximum case length: 9.9 in
Minimum case length: 1.0 in
Example: 2 4 = 2.4 in

C: Total Length Option

1 0 1.0 metre (3.3 feet)
5 0 5.0 metres (16.4 feet)
9 0 9.0 metres (29.5 feet)

Note: Five metre probes are designed for use with the five metre Proximitor Sensor only.

D: Connector and Cable-Type Option

0 1 Miniature coaxial ClickLoc connector with connector protector, standard cable
0 2 Miniature coaxial ClickLoc connector, standard cable
1 1 Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable
1 2 Miniature coaxial ClickLoc connector, FluidLoc cable

E: Agency Approval Option

0 0 Not required
0 5 Multiple Approvals

3300 XL 11 mm Proximity Probes, Metric:

330703 3300 XL 11 mm Probe, M14 x 1.5 thread, without armor

330704 3300 XL 11 mm Probe, M14 x 1.5 thread, with armor

330709 3300 XL 11 mm Probe, M16 x 1.5 thread, without armor

330710 3300 XL 11 mm Probe, M16 x 1.5 thread, with armor

Part Number-AXXX-BXXX-CXX-DXX-EXX

Option Descriptions

A: Unthreaded Length Option

Note: Unthreaded length must be at least 26 mm less than the case length.

Order in increments of 2 mm.
Length configuration:
Maximum unthreaded length: 224 mm
Minimum unthreaded length: 0 mm
Example: 0 6 0 = 60 mm

B: Overall Case Length Option

Order in increments of 2 mm.
Metric thread configurations:
Maximum length: 250 mm
Minimum length: 26 mm
Example: 0 6 0 = 60 mm

C: Total Length Option

1 0 1.0 metre (3.3 feet)
5 0 5.0 metres (16.4 feet)
9 0 9.0 metres (29.5 feet)

Note: Five metre probes are designed for use with the five metre Proximitor Sensor only.

D: Connector and Cable-Type Option

0 1 Miniature coaxial ClickLoc connector with connector protector, standard cable
0 2 Miniature coaxial ClickLoc connector, standard cable
1 1 Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable
1 2 Miniature coaxial ClickLoc connector, FluidLoc cable

E: Agency Approval Option

0 0 Not required
0 5 Multiple Approvals

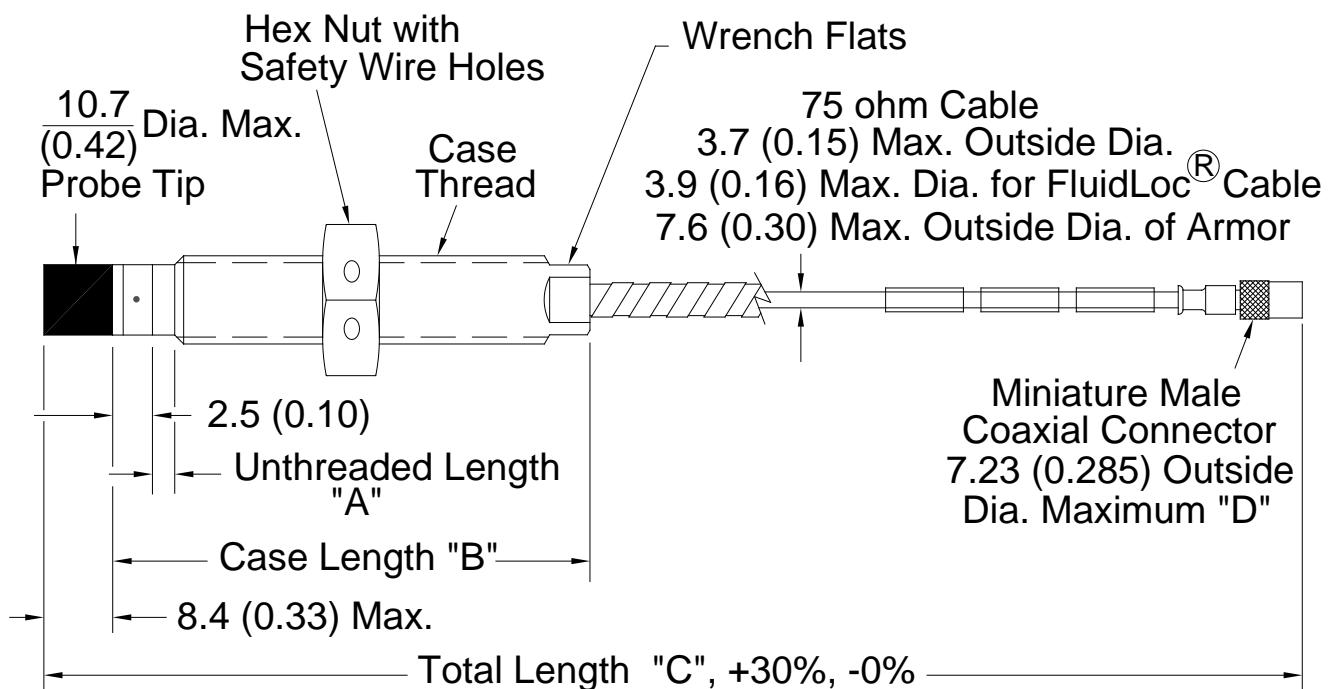


Figure 11 3300 XL 11 mm Proximity probes, Standard Mount

330701, 1/2-20 UNF-2A, without armor

330702, 1/2-20 UNF-2A, with armor

330703, M14X1.5 thread, without armor

330704, M14X1.5 thread, with armor

330707, 5/8-18 UNF-2A, without armor

330708, 5/8-18 UNF-2A, with armor

330709, M16X1.5 thread, without armor

330710, M16X1.5 thread, with armor

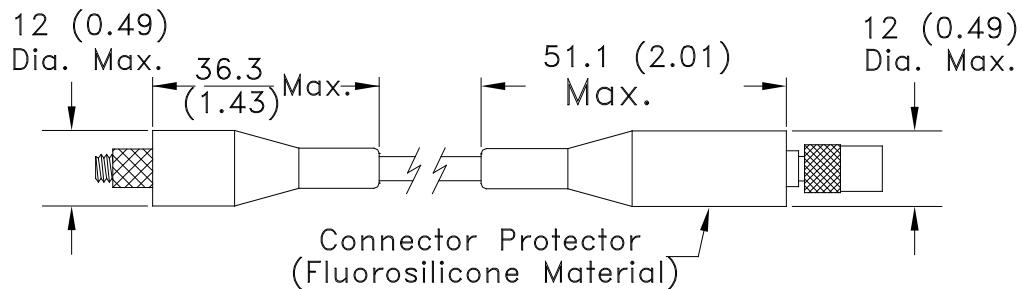


Figure 12 Installed Connector Protectors